

# Brita® Hydration Station® with Lifecycle Control

## RECESSED-MOUNT MODEL 2000S

### FEATURES & BENEFITS

#### SENSOR OPERATED

Electric sensor allows for touch-free hygienic operation, eliminating the need for manual activation under a number of circumstances.

#### QUALITY CONTROL

The Brita® Hydration Station® is pre-built and fully water and pressure tested to ensure no leaks and proper function for reduced installation time and added peace of mind.

#### DURABLE FINISH

#4 satin stainless steel back panel can be easily cleaned and maintained while also resisting corrosion.

#### SERVICING & SECURITY

Durable ABS plastic front panel allows simple access to internal components. 30-second time-out prevents unwanted use. Hidden lock and hinges discourage vandals.

#### ADVANCED FILTRATION

2,500 gallon (9464 L) capacity, electronic lifecycle control filter cartridge will shut off water flow when capacity is reached to ensure great-tasting water with every activation. Filter replacement indicator light will flash yellow when filter life is at 10% and will flash red when replacement is necessary. Preparing to replace filter is important when the filter light flashes yellow.

#### EXTENDED WARRANTY

Product carries an extended 3-year warranty.



### OPTIONS

- ☐ Filter: Brita® Model 6429 is the replacement filter for the BRITA® HYDRATION STATION® Model 2000S
- ☐ Chiller: Model HCR8, chiller provides for instantaneous cooling to meet a continuous demand for chilled water
- ☐ Chiller mounting frame: Model MTGFR.HSC

### SPECIFICATIONS

Model 2000S BRITA® HYDRATION STATION® is a semi-recessed, wheel chair accessible bottle filling station constructed of durable ABS plastic and 16-gauge, Type 304 Stainless Steel with a satin finish. It features an electric sensor for touch-free hygienic operation, laminar flow to prevent splashing, and a .5 gpm (1.3 L) flow rate for quick fill-up. 2,500 gallon (9464 L) carbon block filter reduces chlorine (taste and odor) and lead, and removes 99.99% of cysts. The mounting frame is of heavy-gauge, galvanized steel. 110 volt, 60Hz, and .1 amp draw when in use. Tailpiece is 1-1/4" (32 mm) O.D. Provision for trap (not included) must be made in or behind wall. External dimensions: 15"W x 3.94"D x 30.25"H, Rough-in dimensions: 14.25"W x 25.8"H, fits in 2' x 4' wall.

### APPLICATIONS

Perfect for either public or private indoor settings, the BRITA® HYDRATION STATION® is a great fit in areas where aesthetics and reliability are important. Specifically, this type of semi-recessed, wall-mounted bottle filling station is ideal for office buildings, airports, schools, manufacturing facilities and municipalities.


Model 2000S meets the Americans with Disabilities Act when mounted at the correct height. HAWS® manufactures drinking fountains and electric water coolers to be lead-free by all known definitions including NSF/ANSI Standard 61, Section 9, NSF/ANSI Standards 42 & 53, NSF/ANSI 372, and CSA Standard B483.1. Product is compliant to California Health and Safety Code 116875 (AB1953), California Proposition 65 and the Federal Safe Drinking Water Act. Model 2000S is certified to the standard for Water Treatment Appliances (UL 979).



By HAWS CORPORATION® • [www.BritaHydrationStation.com](http://www.BritaHydrationStation.com) • Call Haws at 1.888.909.4297


The BRITA trademark and logo are registered trademarks of Brita LP and are used under license by Haws Corporation. All rights reserved.

REV. 06/14

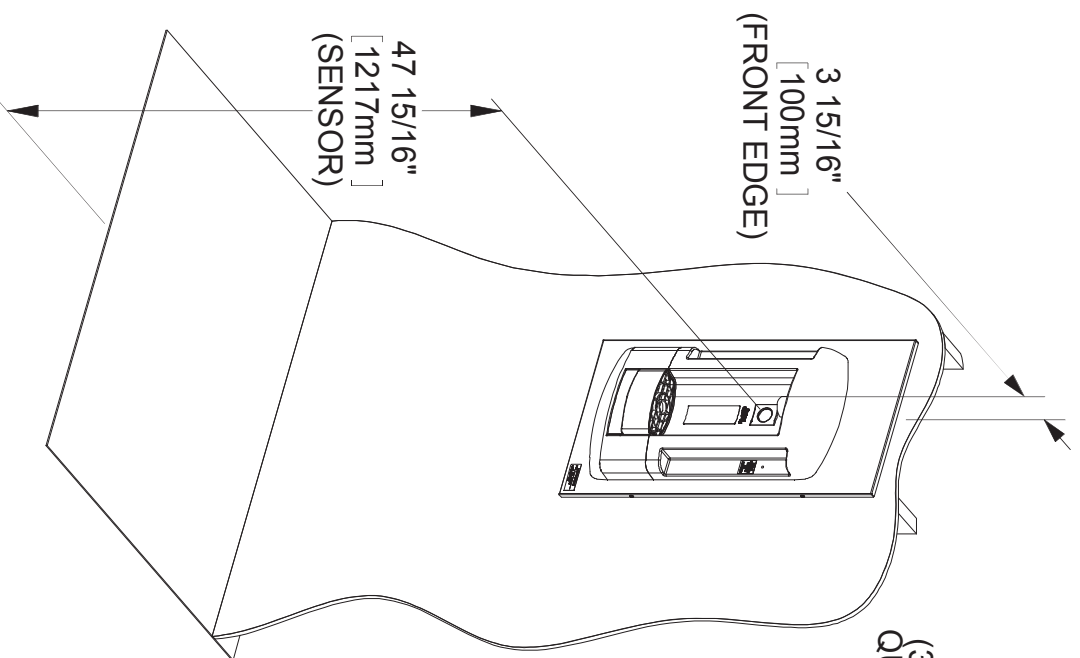

25-7/8" [657] HEIGHT  
14-1/4" [362] WIDTH  
FITS IN 2 X 4 WALL

30-1/4" [768] HEIGHT  
15" [381] WIDTH  
3-15/16" [100] DEPTH

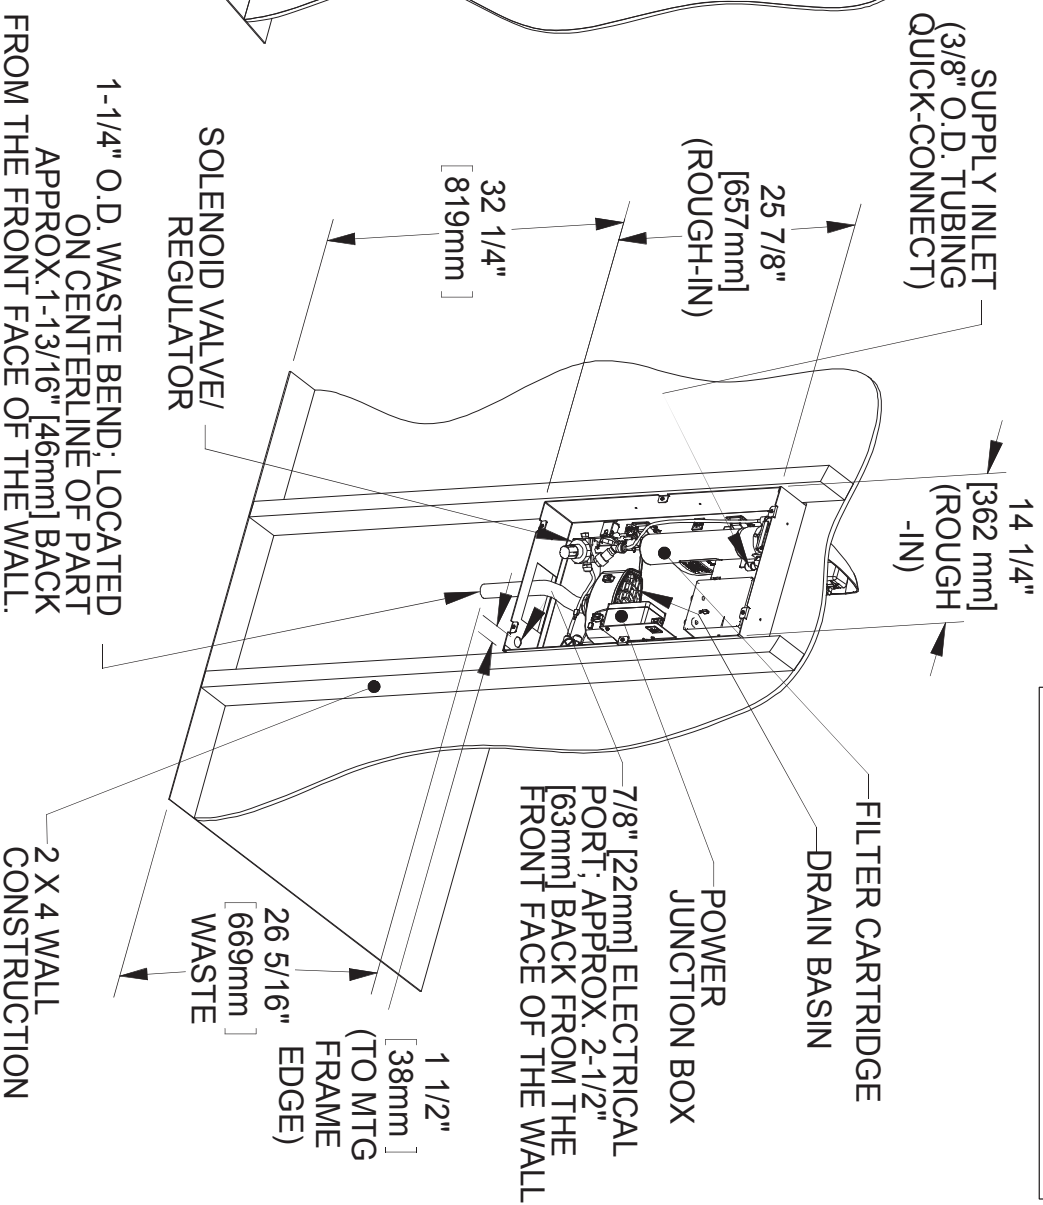

1455 KLEPPE LANE  
SPARKS, NEVADA 89431  
(775) 359-4712 FAX (755) 359-7424  
E-MAIL: HAWS@HAWS.CO.COM  
WEBSITE: WWW.HAWS.CO.COM

EQ: NO. REUSED PERBY:		MODEL(S)	
480	ENVS	2000S	
DRAWN	DATE	CHKD:	
JL	212		
APPROVED	DATE	SCALE:	N/A
		DRAWING TYPE:	INSTALLATION
		SIZE:	A
		SHEET	1 OF 2
PART NUMBER		DRAWING NO.	
0002077009.L		16178A	
RE		4	

BRITA HYDRATION STATION