



DIAMOND-PLATE MATTING

The diamond-plate pattern is, without question, the most popular surface design in ergonomic matting, and for very good reasons. Diamond-plate is easy to clean and tough! It provides good traction to help prevent slips and falls. And it looks really cool!

But, are all ergonomic mats with a diamond-plate pattern on the surface the same? **ABSOLUTELY NOT!** As a matter of fact, what differentiates these products is what you can't see – **THE SPONGE MATERIAL.**

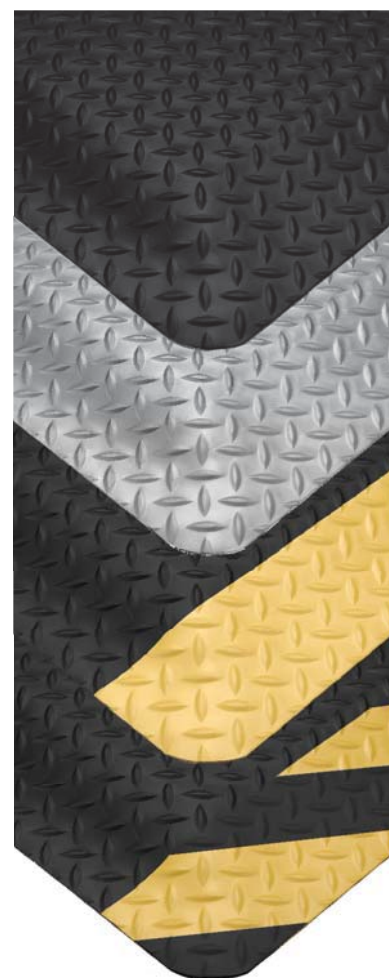
Beneath that rugged diamond-plate surface lies the true heart and soul of the mat – the sponge. The properties of the sponge dictate how the mat will perform in critical criteria such as

- Overall comfort
- Longevity in application
- Ability to customize
- Mat movement on polished floors
- Contribution to green initiatives
- Price of the mat

Wearwell introduced the first diamond-plate mat to the market way back in 1989. And Wearwell has been the Innovator in diamond-plate matting ever since. Today, Wearwell offers more sponge alternatives than any competitor, including

1. Nitricell®: #1 in market share and customer satisfaction for over 20 years, this nitrile rubber-enhanced sponge is the standard by which all others are measured – and fall short!
2. Flex-Link™: A simple PVC sponge, designed to provide an alternative similar to what most competitors offer, at a similar price point.
3. SMART®: A rebound urethane sponge that combines comfort, ecology, and economy in a unique product available only from Wearwell.

So, don't be fooled by all the "look-alike" diamond-plate products out there. Choose from Wearwell's unparalleled range of sponge alternatives to provide you the perfect diamond-plate product for your needs.



Good
















SMART®

Better

SELECT

Best

SPONGECOTE®

| | | | |
|---|--|---|--|
| PRODUCTS | SMART® Diamond-Plate No. 497 | Diamond-Plate Select No. 495 | UltraSoft Diamond-Plate No. 414, Diamond-Plate SpongeCote® No. 415 and Diamond-Plate with Grit No. 416 |
| SPONGE BASE | SMART® – a recycled urethane composite sponge, less durable overall, but designed for budget-conscious or environmentally conscious operations. | Flex-Link™ – dense, closed-cell PVC sponge designed with similar performance characteristics to others on the market. | Nitricell® – a premium nitrile rubber composite sponge formulated for crush resistance and extended performance. |
| RESILIENCE | Good rebound, proven for use in many commercial applications as a flooring-system underlayment. | Good resilience, good recovery. | Best in its class. It continues to bounce back and provides long-term employee satisfaction. |
| STANDING AREA | Extends to within 2”–3” of each edge. | Extends to within 2”–3” of each edge. | Extends to within 1” of the edge of the mat, providing more standing room. |
| BEVEL | Sponge edges are not beveled. | Sponge features rounded corners on stock sizes. | Sponge offers built-in trip-prevention bevel on standard sizes. |
| WARRANTY | 1 year | 3 years | 4 years |
| THICKNESS | Available in two thicknesses: UltraSoft  Standard  Surface lays over square sponge to create the bevel. | Available in two thicknesses: UltraSoft  Standard  Surface lays over rounded sponge to create the bevel. | Available in two thicknesses: UltraSoft  Standard  Pre-beveled sponge gives mat its lay-flat characteristics. |
| COLORS | Black and Black/Yellow | Black and Black/Yellow | Black, Black/Yellow, Black/Chevron, and Gray |
| CUSTOMIZATION, APPLICATION & GREEN RATING |    |    |    |
| FLAMMABILITY (SURFACE) | MVSS 302: “A” Rating | MVSS 302: “A” Rating | MVSS 302: “A” Rating No. 414: EN13501- CS1 |
| FLAMMABILITY (SPONGE) | HMIS = 1 Flash Point: >400°F Open Cup, NFPA = 1 | DOC FF1-70: Flame Retardant Rating | MIL-P12420C: Burned for <5 seconds No. 414: EN13501- CS1 |
| COEFFICIENT OF FRICTION | ASTM F1677: Dry: .68 | ASTM F1677: Dry: .68 | ASTM F1677: No. 414 & No. 415: Dry: .68 No. 416: Dry: 1.10, Wet: 1.0 No. 415: DIN 51130 R10 |
| TABOR ABRASION | Fed. Std. 191: < 1% lost @ 1,000 cycles | Fed. Std. 191: < 1% lost @ 1,000 cycles | Fed. Std. 191: < 1% lost @ 1,000 cycles |

We Frequently Customize SpongeCote® Products!

If you have a U- or L-shaped work area, we can make a mat to fit it. If your space requires a circular, oval, or triangular mat, simply give us a template. If you have cut-outs in odd places, we can accommodate that too. The sky is the limit!

Some mats may require two or more sections depending on size, weight, and shipping requirements. Square edges are also available.



Good

SMART®
DIAMOND-PLATE NO. 497

An economical and green solution for preventing worker fatigue. Comfort and resilience that surpasses traditional sponges.

Better

DIAMOND-PLATE
SELECT NO. 495

High-tech industrial surface withstands heavy use while its specially formulated blown-vinyl Flex-Link™ sponge base lessens standing worker fatigue.

Best

ULTRASOFT DIAMOND-PLATE
NO. 414, DIAMOND-PLATE
SPONGECOTE® NO. 415

2X the resilience and 3X the life of look-a likes! Our pre-beveled edge assures a perfect lays-flat quality. We also extend the sponge within 1" of the top surface for 20% more standing area than others in the

| PART INFORMATION | 1" THICK | 5/8" THICK | 15/16" THICK | 9/16" THICK | 15/16" THICK | 9/16" THICK |
|------------------|---|-------------|---|--------------|--|--------------|
| 2' x 3' | 497.1x2x3 | 497.58x2x3 | 495.1516x2x3 | 495.916x2x3 | 414.1516x2x3 | 415.916x2x3 |
| 3' x 5' | 497.1x3x5 | 497.58x3x5 | 495.1516x3x5 | 495.916x3x5 | 414.1516x3x5 | 415.916x3x5 |
| 2' x 75' | 497.1x2x75 | 497.58x2x75 | 495.1516x2x75 | 495.916x2x75 | 414.1516x2x75 | 415.916x2x75 |
| 3' x 75' | 497.1x3x75 | 497.58x3x75 | 495.1516x3x75 | 495.916x3x75 | 414.1516x3x75 | 415.916x3x75 |
| 4' x 75' | 497.1x4x75 | 497.58x4x75 | 495.1516x4x75 | 495.916x4x75 | 414.1516x4x75 | 415.916x4x75 |
| 5' x 75' | | | | | 414.1516x5x75 | 415.916x5x75 |
| 6' x 75' | | | | | 414.1516x6x75 | 415.916x6x75 |
| | <i>Cuts up to 75' are available. When ordering, please specify color: Black (BK), Black/Yellow (BYL), or Black/Chevron (CHV).</i> | | <i>Cuts up to 75' are available. When ordering, please specify color: Black (BK), Black/Yellow (BYL), or Black/Chevron (CHV).</i> | | <i>3', 4', 5', and 6' cuts up to 75' are available in Black (BK) or Black/Yellow (BYL). 2', 3', and 4' cuts up to 75' available in Gray (GY) or Black/Chevron (CHV).</i> | |

| WITH GRIT SHIELD | | | | | | |
|------------------|--|--|--|--|--|--------------|
| 2' x 3' | | | | | 416.1516x2x3 | 416.916x2x3 |
| 3' x 5' | | | | | 416.1516x3x5 | 416.916x3x5 |
| 2' x 75' | | | | | 416.1516x2x75 | 416.916x2x75 |
| 3' x 75' | | | | | 416.1516x3x75 | 416.916x3x75 |
| 4' x 75' | | | | | 416.1516x4x75 | 416.916x4x75 |
| | | | | | <i>2', 3', and 4' cuts up to 75' are also available.</i> | |



Diamond-plate mats, though most common in industrial or heavily trafficked areas, are also popular in lab environments due to ease of maintenance, resistant surface, overall comfort, and performance.

LOOKING FOR A RUNNER? CONSIDER REJUVENATOR® RUNNERS FOR UNLIMITED LENGTH AND LONGER-LASTING PERFORMANCE (PAGE 8)!