


Itek™

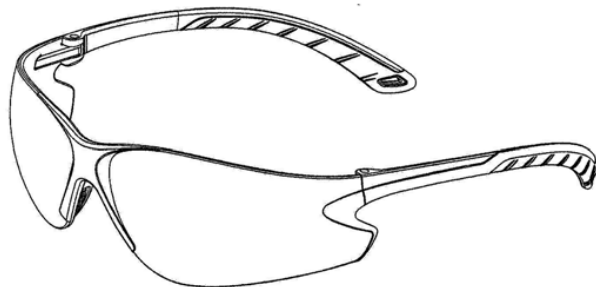

SPECIAL FEATURES

- Entering into a new dimension with Itek, the next generation of Ztek.
- Newly designed ventilated nosepiece allows heat to dissipate from nose bridge to reduce fogging.
- Soft dual injected rubber temple tips and flexible nosepiece provide non-slip comfort.
- 9.75 base curve lens provides excellent side protection against airborne particles.
- Lightweight, frameless protection is ideal for all-day wear.
- Lenses provide 99% protection against UV rays.

GENERAL SPECIFICATIONS

- Lens thickness: 2.3mm
- PD: 68mm
- Lens Base: 9.75 curve
- Weight: 22gm
- Lens size vertical: 43.3mm
- Lens size diagonal: 78mm
- Bridge: 12.5mm
- Temple length (lens-tip): 156mm
- Overall width (hinge-hinge): 132.9mm
- Closest point between lens: 16.3mm
- Closest point between temple tips: 69.2mm

FRAME & LENS OPTIONS

- Various Temples
 - o Clear, Clear Anti-fog, Gray, Gray Anti-Fog, Amber, Infinity Blue, Silver Mirror, Indoor/Outdoor Mirror

| COMPONENT | MATERIAL | FEATURES |
|--------------|---------------------|---|
| Lens | Polycarbonate | 9.75 base Curve, Wrap around design w/side protection |
| Frame | N/a | N/a |
| Side Shields | Polycarbonate | Integral to lens |
| Nose piece | PVC | Pillow softness |
| Temple Tips | Polycarbonate + TPE | Spatula with soft tip end |
| Hinge | Polycarbonate | 3 Barrel Type, integral to Frame/Sleeve |
| Screw | Stainless Steel | Standard Hinge screw |

MARKINGS

Lens: As per standard
Frame: As per standard

PACKAGING

1 pc in a polybag; 12 pcs in an inner box; 300 pcs in a case

STANDARDS

Meets ANSI Z87.1-2003, CE EN166 and CSA Z94.3