


PRODUCT FILE

#2102

GENERAL SPECIFICATIONS(mm)

Lens thickness: 2.3mm
PD: 68 m
Lens Base: 6.5 curve
Weight: 28 gm
Lens size vertical: 50.6 mm
Lens size diagonal: 145.2 mm
Bridge: 17.2 mm
Temple length(lens-tip): 143.5 mm
Overall Width(hinge-hinge): 139.5 mm
Closest point between lens: n/a
Closest point between temple tips: 20 mm

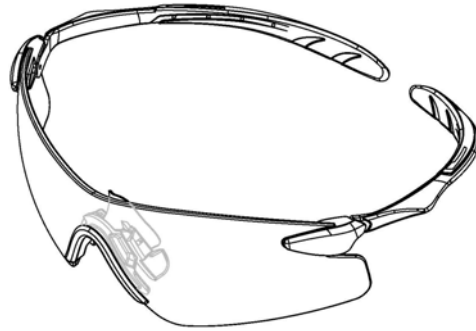

COMPONENT	MATERIAL	FEATURES
Lens	Polycarbonate	6.5 base wrap around lens
Parts	Polycarbonate	Secured with lens with screws.
Nose piece	Polycarbonate	Soft nose pad slips on hard nose piece, universal fit
	TPE	
Temple	Polycarbonate	Rotatable temple type, co-injected soft temple tips for comfort
Temple tip	TPE	
Hinge	Polycarbonate / polycarbonate	3 Barrel Type
Screw	Stainless Steel	Standard Hinge screw

FRAME AND LENS OPTIONS

Frame colors:	Various
Lens options:	Standard color, special tint, or mirror lens available

SPECIAL FEATURES

- * 6.5C wraparound lens for maximal eye protection without distraction in the middle of lens.
- * Rotatable temples creates the minimal dimension after closed, easily for users to retain.
- * TPE-made nose pads generate the soft cushions to the wearer.
- * Unisex design incorporates the elements of safety and sports eyewear.
- * Suitable for safety, sports, shooting & hunting market.
- * Scratch-resistant, polycarbonate lens provide 99.9% of UV protection

MARKINGS		PACKAGING
Lens	Markings will be done based on the approved marking confirmation on this model.	1 pc in a PP bag
Frame		12 pcs per inner box
APPROVALS		300 pcs in an outer carton
Certificate	To be advised	
Meet	ANSI, CE, AS, and CSA	