


V3G

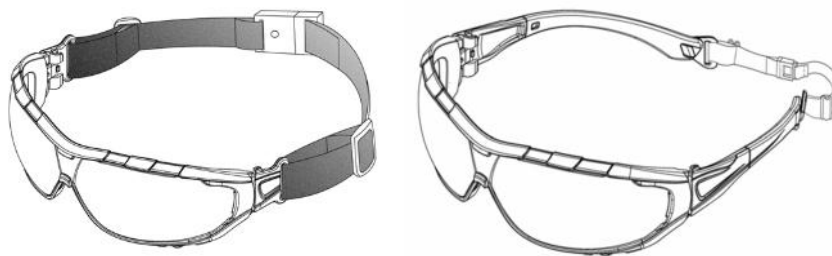

SPECIAL FEATURES

- The most up-to-date safety eyewear with two versions (spectacle + goggle) for end-users to interchange.
- Full wraparound 9 base polycarbonate lens offers superior coverage & impact protection against flying particles
- Indirect ventilation with soft foam on the frame provides the maximal dust protection with sufficient airflow as outlet for heat
- Two lens options available – Plano version and RX version. The RX version is adaptable to RX insert frame. Polycarbonate lenses filter out more than 99.9% of harmful UV radiation
- Fully adjustable elastic band for both spectacle & goggle versions

GENERAL SPECIFICATIONS

- Lens thickness: 2.1 mm
- PD: 68 mm
- Lens Base: 9 curve
- Weight: 47 gm (goggle) 44 gm (spectacle)
- Lens size vertical: 55.2 mm
- Lens size diagonal: 142.5 mm
- Bridge: 22 mm
- Overall length (lens-tip): 76 mm (goggle version)
- Overall length (lens-tip): 76 mm (temple version)
- Overall Width (hinge-hinge): 141 mm (spectacle version)
- Closest point between strap holding parts (temples): 144mm (53.3mm)
- Strap length: 417mm (goggle) / 158mm (temples)

FRAME & LENS OPTIONS

- Frame colors: Black
- Lens options: Clear, Gray, Amber and Indoor/Outdoor Mirror

COMPONENT	MATERIAL	FEATURES
Lens	Polycarbonate	9 base single lens
Frame	Nylon	Flexible fitting body with indirect ventilation
Foam	CR(up) + EVA(down) foam	Flexible material with cushion provides the top protection from dusts and flying particles with the best fit and comfort
Nose piece	CR foam	Universal, integral to foam carriage
Ratchet	Polycarbonate	Hinges are pin-insert style, integral with 3-position angle adjustable structure
Temple	Polycarbonate	Straight side sports style
Temple tip	TPR	Soft and flat without pressure
Temple Strap Holder	Nylon	Sewed with thin strap
Goggle Strap	Polyester	Adjustable textile elastic fixed on strap holders with quick-release parts
Goggle Strap Holder	Polycarbonate	Sewed with wide strap

MARKINGS

Lens: As per standard

Frame: As per standard

PACKAGING

1 pc in a polybag; 12 pcs in an inner box; 144 pcs in a case

STANDARDS

Meets ANSI Z87.1, CE EN166, AS/NZS 1337 and CSA 94.3