


# Venture 3®

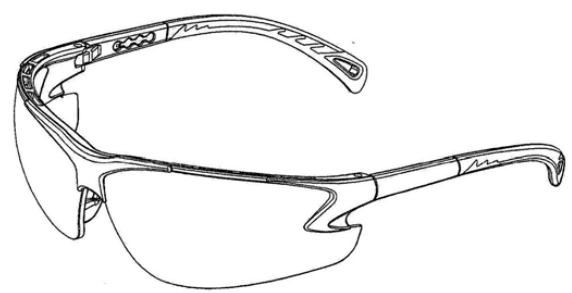

## SPECIAL FEATURES

- Venture 3 has arrived, transporting Venture II to the next level.
- Newly designed ventilated nosepiece is soft and adjustable, allowing heat to dissipate from nose bridge and reduce fogging.
- Perfectly balanced from temple tips to the bridge of the nose, providing the best fit possible.
- High quality optics offer extreme clarity and no distortion.
- Soft dual-injected rubber temple tips combined with fully adjustable straight back temples reinforce the highest level of comfort and fit.
- Top of frame has 8 vented slots allowing air to circulate and prevent fogging.
- 9.5 base curve lens provides excellent side protection against wind and airborne particles.
- Lenses provide 99% protection against harmful UV rays.

## GENERAL SPECIFICATIONS

- Lens thickness: 2.3mm
- PD: 68mm
- Lens Base: 9.50 curve
- Weight: 28gm
- Lens size vertical: 46.6mm
- Lens size diagonal: 82mm
- Bridge: 12.8mm
- Temple length (lens-tip): 150-163mm
- Overall Width (hinge-hinge): 139.4mm
- Closest point between lens: 13.1mm
- Closest point between temple tips: 91mm

## FRAME & LENS OPTIONS

- Black Frame
  - o Clear, Clear Anti-fog, Gray, Gray Anti-fog, Amber, Infinity Blue, Silver Mirror, Indoor/Outdoor Mirror

COMPONENT	MATERIAL	FEATURES
Lens	Polycarbonate	Full eye protection
Frame	Polycarbonate	Lens clip in frame – Vented at top for air circulation – helps prevent fogging (8 slots)
Side Shields	Polycarbonate	Integral to lens
Nose piece	Bridge –Polycarbonate	Integral to frame
	Nose Pad – PVC	Pillow softness
Sleeve	Polycarbonate	4 length position adjustment
Temple Tips	Polycarbonate + TPE	Length adjustable with additional co-injected soft cushion tips.
Hinge	Polycarbonate	3 barrel type
Screw	Stainless Steel	Standard hinge screw

## MARKINGS

Lens: As per standard

Frame: As per standard

## PACKAGING

1 pc in a poly bag; 12 pcs in an inner box; 300 pcs in a case

**STANDARDS** Meets ANSI Z87.1 High Impact Requirements, CE EN166, CSA Z94.3, MCEPS Class 1